



## GLU-BOT GLUE BOTTLES



- Comes with blade and yorker style tip.
- For vertical and horizontal applications.
- Easy-squeeze bottle, spill-proof nozzle.
- No more messy tips.

**FastCap**

ORDER #	DESCRIPTION	PKG.	UNIT
<b>GLUE BOT</b>			
GB.GLUBOT	16 OZ. GLUE BOTTLE	1	EACH
GB.BLADE.TIP	BLADE GLUE TIP (5/PK)	1	PK
GB.YORKER TIP	YORKER GLUE TIP (5/PK)	1	PK
GB.LID-RING	LID & RETAINING RING	1	EACH
GB.G.REDCAP	RED CAP - (5/PK)	1	PK
<b>BABE BOT</b>			
GB.BABEBOT	4 OZ. GLUE BOTTLE	1	EACH
GB.BABE.BLADE.TIP	BLADE GLUE TIP (5/PK)	1	PK
GB.BABE.YORKER TIP	YORKER GLUE TIP (5/PK)	1	PK
GB.BABELID-RING	LID & RETAINING RING	1	EACH
GB.BABE.REDCAP	RED CAP - (5/PK)	1	PK

## BREEZE TIP GLUE APPLICATOR



- Efficient way to spread adhesive on solid surface countertops.
- Clips on to the end of a static mixing tip and allows you to easily spread a uniform film of adhesive.



**FastCap**

ORDER #	DESCRIPTION	PKG.	UNIT
BREEZETIPWG	GLUE APPLICATING TIP (10/PK)	1	PK

## FASTCAP 2P-10 KIT ADHESIVE SYSTEM



- 2P-10 is a two part, 10 second bond adhesive.
- Apply the adhesive, then spray the activator and stick it together for a strong permanent bond.
- Comes with medium and thick adhesives for bonding different surfaces, activator for a fast permanent bond, and debonder for removing glue residue.

**FastCap**

ORDER #	DESCRIPTION	PKG.	UNIT
2P10.KIT	ADHESIVE SYSTEM KIT	1	SET
2P10.THICK	1 OZ. THICK ADHESIVE REFILL	1	EACH
2P10.MEDIUM	1 OZ. MEDIUM ADHESIVE REFILL	1	EACH
2P10.ACTIVATOR	2 OZ. ACTIVATOR REFILL	1	EACH
2P10.DEBONDER	2 OZ. DEBONDER REFILL	1	EACH
2P10.PUMPSPRAYLID	REPLACEMENT PUMP	1	EACH
2P10 THICK 10OZ	THICK ADHESIVE (10 OZ.)	1	EACH
2P10 MED 10OZ	MEDIUM ADHESIVE (10 OZ.)	1	EACH

## FASTCAP 2P-10 SOLO ADHESIVE SYSTEM



- Primarily for production environment where contents will be used up quickly.
- 2-part 10-second bond adhesive.
- Bonds almost all surfaces.
- "No Clog" cap.

**FastCap**

ORDER #	DESCRIPTION	PKG.	UNIT
2P10 SOLO	2P-10 SOLO KIT	1	EACH
2P10SOLO.THICK.2OZ	REFILL THICK (2 OZ.)	1	EACH
2P10SOLO.ACTIVE.12O	REFILL ACTIVATOR (12 OZ.)	1	EACH

## FASTCAP 2P-10 JEL ADHESIVE



- Excellent for vertical surfaces, even ceilings.
- Does not dry as quickly as thick 2P-10, giving you longer open time for positioning parts.

**FastCap**

ORDER #	DESCRIPTION	PKG.	UNIT
2P-10 GEL 10OZ	JEL ADHESIVE (10 OZ.)	1	EACH

## TITEBOND® WOOD GLUE

*Franklin International*



- Strong initial tack.
- Sandable.
- Superior strength, professional results.

ORDER #	SIZE	COLOR	PKG.	UNIT
506-2	4 OZ.	YELLOW	48	EACH
506-3	8 OZ.	YELLOW	24	EACH
506-4	16 OZ.	YELLOW	12	EACH
506-5	QUART	YELLOW	12	EACH
506-6	GALLON	YELLOW	4	EACH
506-7	5-GAL.	YELLOW	1	EACH

## TITEBOND® II WOOD GLUE

*Franklin International*



- Strong initial tack.
- Resists solvents, heat and water.
- Paintable.
- Water cleanup, safe to use.

ORDER #	SIZE	COLOR	PKG.	UNIT
500-2	4 OZ.	YELLOW	12	EACH
500-3	8 OZ.	YELLOW	12	EACH
500-4	16 OZ.	YELLOW	12	EACH
500-6	GALLON	YELLOW	2	EACH

## SUPER TITEBOND®

*Franklin International*



- Strong initial tack.
- Sandable.
- Superior strength.
- Professional results.

ORDER #	SIZE	COLOR	PKG.	UNIT
507-7	5-GAL.	YELLOW	1	EACH

## TITEBOND® EXTEND

*Franklin International*



- Slower setting version of Titebond Original, useful in complex assemblies that require more time to align.
- Excellent sandability, unaffected by finishes.

ORDER #	SIZE	COLOR	PKG.	UNIT
9106	GALLON	YELLOW	1	EACH
9107	5-GAL.	YELLOW	1	EACH

## TITEBOND® III

*Franklin International*



- Stronger bond on wood-to-wood applications than polyurethane adhesives.
- Doesn't foam, cleans up with water.
- Especially useful for outdoor applications in cooler temperatures, or when concern for substantial moisture calls for Type 1.
- Longer working time, requires less clamp time.

ORDER #	SIZE	COLOR	PKG.	UNIT
1416	GALLON	YELLOW	1	EACH

## GLUE BOTTLE

*Franklin International*



- Empty glue bottle & tips, sold separately.

ORDER #	DESCRIPTION	PKG.	UNIT
60003	16 OZ. GLUE BOTTLE	86	EACH
60007	GLUE BOTTLE TIP	100	EACH

## WELDWOOD® CARPENTER'S GLUE



- Professional quality aliphatic resin wood/multi-purpose glue.
- Sets fast, grips tight, sands easily when dry.
- Heat, water and solvent resistant, non-toxic.

ORDER #	SIZE	COLOR	PKG.	UNIT
00492	QUART	YELLOW	12	EACH
00493	GALLON	YELLOW	4	EACH



## ROO WOOD - PVA WOOD GLUE



- Roo Wood is a PVA-aliphatic adhesive formulated for bonding wood and wood composites.
- Can be used on hardwoods, softwood, particle board, hardboard, MDF, OSB, wafer board, as well as paper and fabric.
- Water soluble, has quick tack and bonds to form a water resistant glue line.
- Resists most solvents, sandable and emits no organic vapors.
- Clamp time can be as short as one hour with cure time normally 4 hours at 70°.
- For best results, bonded materials should be allowed to cure overnight before machining.



ORDER #	SIZE	COLOR	PKG.	UNIT
RW-1GL	GALLON	YELLOW	4	EACH

## TITEBOND® POLYURETHANE GLUE



- 100% waterproof, interior/exterior.
- Bonds wood, metal, ceramics, plastic and more.
- Professional-strength waterproof glue formulated for multi-purpose applications.
- Excellent sandability, unaffected by finishes.
- 100% solids, solvent free.
- Will not expand or contract in the glue joint.



ORDER #	SIZE	COLOR	PKG.	UNIT
2302	4 OZ.	YELLOW	12	EACH
2303	8 OZ.	YELLOW	12	EACH
2300	12 OZ.	YELLOW	12	EACH

## HIDE GLUE



- Ready-to-use liquid formulated.
- Long set-time, heat resistant.
- Excellent strength and sandability.
- Sensitivity to moisture allows for easy disassembly of parts, a benefit for antique restoration or repair of musical instruments.
- Can be used to create a "crackling effect" on wood.



ORDER #	SIZE	COLOR	PKG.	UNIT
5014	16 OZ.	AMBER	12	EACH

## ROOGLUE® MELAMINE & VINYL ADHESIVE




- Ready-to-use acrylic emulsion formulated to adhere a wood edge to a melamine surface.
- Water-based, non-flammable, non-toxic.



ORDER #	SIZE	COLOR	PKG.	UNIT
R-2032	16 OZ.	CLEAR	32	EACH
R-1GL4	GALLON	CLEAR	4	EACH
BR-16	16 OZ. GLUE BOTTLE		175	EACH
YK-CP	GLUE BOTTLE TIP		1400	EACH

**New items are always being added.**  
**Please call us if you need an item not listed.**

## PERMAGRIP® PG107 HI-TEMP ADHESIVES

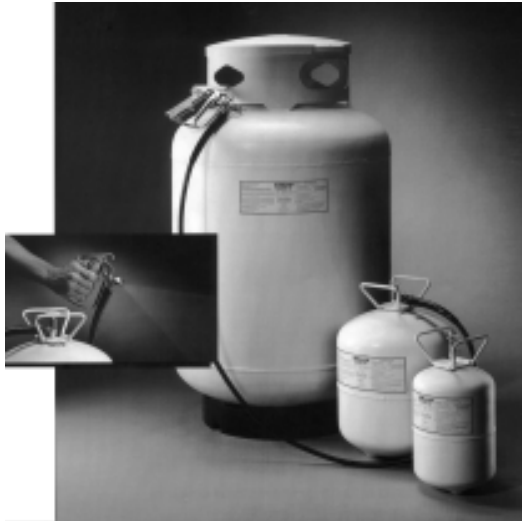

- A high-temperature resistant, high-performance grade contact adhesive in a flammable propellant.
- Suitable for particle board, wood, foam, fabrics, and other substrates.
- Not recommended for use with plasticized vinyls, flexible plastics or expanded polystyrene.
- Designed for permanent bonding of materials where immediate bond strength and good heat resistance are required.
- Its shear and peel strength makes it ideal for bonding high pressure laminates to various substrates and auto, RV & boat interiors.
- Fast dry times of 1 to 2 minutes and 5 to 10 minute open time. Times may vary due to temperature and humidity.
- Free of Ozone-Depleting chemicals and free of CFC's.
- Self contained, portable system.

### SPECIFICATIONS

- Viscosity: 350 cps 77F sp#2, 30 r.p.m.
- Total Solids: 28%.
- System Flammability: Nonflammable adhesive with flammable propellant.
- Shear: >150 PSI, 90° Peel (1 sq. inch)>25 PSI.
- Tensile: (180° Peel) 25PLI .
- Shear adhesion failure temp (SAFT) 100gr>250°F.
- Heat resistance (1 inch/100gr.) 220F.

ORDER #	DESCRIPTION	PKG.	UNIT
PG10738LB	38 LB. DISPOSABLE CYLINDER - CLEAR	1	EACH
PG10738LBG	38 LB. DISPOSABLE CYLINDER - GREEN	1	EACH
LJC 6106	SPRAY GUN WITH TIP	1	EACH
LJC 6102	12FT. SPRAY HOSE	1	EACH
LJC 6104	25FT. SPRAY HOSE	1	EACH
LJC 6501	SPRAY TIPS	1	EACH

## HOT MELT ADHESIVE

### KS208

- Medium viscosity, multi-purpose EVA based hot melt.
- Spreads/flows easily, good for older/smaller equipment.
- Recommended Applications: veneer, polyester, PVC, melamine, thick PVC, ABS.

### TECHNICAL DATA

- Viscosity - (Rheomat 15 T) at 200°C: 320,000 mPas.
- Softening Point: 110°C (230°F).
- Heat/Cold Resistance: 105°C (220°F)/-10°C (14°F).



woodtape

### KS217

- Low viscosity, EVA based hot melt - recommended for use in granular feed or quick step hot melt systems.
- Fast melting properties & easy spread and flow characteristics ideal for smaller or older edgbanding equipment.
- Excellent wetting properties & superior bonding strength.
- Recommended applications: veneer, polyester, PVC, melamine, solid wood, ABS, tropical & oily veneers, laminates & thick PVC.

### TECHNICAL DATA

- Viscosity - (Rheomat 15 T) at 200°C: 160,000 mPas.
- Softening Point: 103°C (217°F)
- Heat/Cold Resistance: 85°C (185°F)/-5°C (23°F).

ORDER #	VISCOSITY	COLOR	SIZE	PKG.	UNIT
KS208N	MEDIUM	NATURAL	55 LB.	1	BAG
KS217N	LOW	NATURAL	55 LB.	1	BAG

## SPEED TAPE - PEEL & STICK ADHESIVE



- Apply to veneers and laminates, just peel the liner and stick it!
- Replaces contact cement.
- Super-sticky permanent bond!
- 50' roll.

**FastCap**

ORDER #	SIZE	PKG.	UNIT
S-TAPE.1"X50'	1"	1	ROLL
S-TAPE.6.5"X50	6.5"	1	ROLL

## PERMAGRIP PG107 HI-TEMP AEROSOL ADHESIVE



- Includes adjustable spray tip.
- SPECIFICATIONS**
- Shear > 150 PSI, 90° Peel (1 sq. inch) > 25 PSI.
- Tensile (180° Peel) 25 PLI.
- Shear adhesion failure temp (SAFT) 100gr. > 250°.
- Heat resistance (1 inch/100gr.) 200°F.



ORDER #	DESCRIPTION	PKG.	UNIT
PG107AA	17 OZ. AEROSOL SPRAY CAN	12	EACH

## SUPER SPRAY ADHESIVE



- Fast, aggressive tack for bonding most lightweight materials.
- Low soak-in for long lasting bonds.
- Long bonding range.
- An extremely versatile adhesive.
- Coverage: 220 sq. ft.; % Solids: 25.0



ORDER #	SIZE	COLOR	PKG.	UNIT
77 3M	24 FL. OZ.	NEARLY CLEAR	12	EACH

## HIGH STRENGTH SPRAY ADHESIVE



- High strength, fast, contact-type adhesive.
- One minute drying time.
- High temperature resistance.
- Low misting, precise spray control.
- Variable width spray pattern.
- Coverage: 100 sq. ft.; % Solids: 13.0



ORDER #	SIZE	COLOR	PKG.	UNIT
90	24 FL. OZ.	TRANSLUCEN	12	EACH

## WELDWOOD® CONTACT CEMENT - CARDED



- Strong instant bonds on contact.
- Can be used on a variety of materials.
- Excellent water resistance.
- Handy applicator included in 1 oz. bottle.



ORDER #	SIZE	COLOR	PKG.	UNIT
00107	3 FL. OZ.	TAN	12	EACH

## WELDWOOD® ORIGINAL CONTACT CEMENT



- Premium quality neoprene contact cement dries in 15 minutes.
- Meets all CPSC requirements.
- Requires only one coat on most surfaces.



ORDER #	SIZE	COLOR	PKG.	UNIT
00271	PINT	TAN	12	EACH
00272	QUART	TAN	6	EACH
00273	GALLON	TAN	4	EACH

## WELDWOOD® NON-FLAMMABLE CONTACT CEMENT



- Neoprene rubber formula that provides superior adhesion.
- Cleans up with water.
- Low VOC formula.



ORDER #	SIZE	COLOR	PKG.	UNIT
25336	GALLON	WHITE	4	EACH

## WELDWOOD® GEL FORMULA CONTACT CEMENT



- Same great formula as Original.
- Easy-to-use gel for no drips, no mess.

ORDER #	SIZE	COLOR	PKG.	UNIT
25316	GALLON	TAN	4	EACH

## 0308 PREMIUM BRUSH GRADE CONTACT ADHESIVE - HIGH HEAT RESISTANT, EXTREMELY FLAMMABLE



- Superior quality contact adhesive.
- Designed to allow maximum application of adhesive with brush or roller.
- Broad range of applications in the industry.
- Dries rapidly with high strength and high heat resistance.



ORDER #	SIZE	COLOR	PKG.	UNIT
00094	5-GAL.	NATURAL	1	EACH

## 0306/0307 HIGH HEAT RESISTANT CONTACT ADHESIVE



- The industry standard contact adhesive.
- Meets the requirements of a wide range of applications.
- May be applied with standard hot or cold spray equipment.



ORDER #	SIZE	COLOR	PKG.	UNIT
00095	5-GAL.	NATURAL	1	EACH
00097	5-GAL.	RED	1	EACH

## 2056 PROFESSIONAL BRUSH GRADE CONTACT ADHESIVE



- A medium viscosity formulation, meets the requirements of many applications.
- A general purpose contact adhesive.
- Easy to apply & fast drying.



ORDER #	SIZE	COLOR	PKG.	UNIT
00241	5-GAL.	NATURAL	1	EACH

## I 145 HIGH SOLIDS HIGH HEAT RESISTANT SPRAY GRADE CONTACT ADHESIVE



- High solids, low solvent formula has faster drying time, lower glue line cost, less solvent escapement, lower odor.
- Superior green strength and qualifies for a Class A flame spread rating when tested in accordance with ASTM-E-81 Tunnel test.



ORDER #	SIZE	COLOR	PKG.	UNIT
04140	5-GAL.	RED	1	EACH

## WELDWOOD® WATERPROOF RESORCINOL GLUE



- A two-component glue ideal for exterior structural applications.
- 100% waterproof & weatherproof.
- Meets MIL-A-46051 (Type I, Grade A) (Type II, Grade C) and MIL-A22397 (Grade A).



ORDER #	SIZE	COLOR	PKG.	UNIT
00227	PINT	PURPLE	6	EACH

## FAST-BOND 30 CONTACT CEMENT - NON FLAMMABLE



- Water dispersed, sprayable contact adhesive.
- High immediate bond strength, long bonding range.
- Non-flammable in the wet state.
- Green contact cement will change color from blue to green while drying.
- Good heat resistance. Post-formable.
- May be used to bond foamed plastics, plastic laminate, wood, plywood, wood veneer, and canvas to themselves and to each other.
- NOT RECOMMENDED FOR drywall laminating or metal surfaces unless metal surfaces are completely dried by force drying and protected from moisture.



### PHYSICAL PROPERTIES

- **Base:** polychloroprene.
- **Solvent:** water, toluene, methanol (less than 5%).
- **Consistency:** thin liquid.
- **Viscosity:** Brookfield Viscometer RVF #1 sp. at 20 rpm at 80° (26°C) = 200-750 cps.
- **Solids by Weight:** 47%-51%.
- **Net Weight:** 8.9-9.3 lbs./gal.
- **Application methods:** spray, roller, brush.
- **Coverage rate:** Dry adhesive per surface = 2.5 to 3.5 grams/sq.ft.(27 to 38 grams/sq. m). At 3 grams/sq.ft.(32 grams/sq. m) dry the coverage is approximately 680 sq. ft./U.S. gallon which is sufficient to apply 340 sq. ft. (31.6 sq. m) of laminate, coating both surfaces.
- **Bonding time range:** Plastic laminate to plywood = 4 hours.

ORDER #	SIZE	COLOR	PKG.	UNIT
21186	GALLON	GREEN	4	EACH
21181	GALLON	NEUTRAL	4	EACH
21182	5-GAL.	NEUTRAL	1	EACH

## 4000® SUBFLOOR ADHESIVE



- A heavy-duty construction adhesive.
- Professional strength to meet APA AFG-01; ASTM C-557 and FHA UM-60 Specifications for subflooring and plywood.
- Forms a strong, weatherproof bonds on wet, frozen or dry lumber, metal and concrete.



ORDER #	SIZE	COLOR	PKG.	UNIT
25028	10.3 OZ.	TAN	12	EACH
25117	29.0 OZ.	TAN	12	EACH

## BEATS THE NAIL™ CONSTRUCTION ADHESIVE



- Best all-purpose construction adhesive.
- Provides a high strength head and water-resistant bond which exceeds ASTM C557-73 specifications.
- Less bracing & holding.



ORDER #	SIZE	COLOR	PKG.	UNIT
25082	10.3 OZ.	TAN	24	EACH
25084	29.0 OZ.	TAN	12	EACH

## BEATS THE NAIL™ PANEL & FOAM ADHESIVE



- A high quality, dual-purpose construction adhesive designed to bond paneling or foamboard insulation to a variety of substrates.
- Quick-grab formula reduces nailing requirements.
- Won't etch or burn through.
- Meets ASTM Specification C 557.
- Interior/exterior use.



ORDER #	SIZE	COLOR	PKG.	UNIT
25403	10.3 OZ.	GRAY	12	EACH

## WELDWOOD® PLASTIC RESIN GLUE



- A powdered, urea-formaldehyde wood glue activated by mixing with water.
- Forms a bond stronger than the wood itself.
- Meets Fed. Spec. MMM-A-188C, Type II.
- Low VOC.



ORDER #	SIZE	COLOR	PKG.	UNIT
00203	1 LB.	TAN	6	EACH
00204	4-1/2 LB.	TAN	4	EACH